

HAMILTON

Colours: Coral, Ice Silver, Champagne, Pearl, Clay

Thickness: 10mm, 20mm

Sizes: 300x300mm, 300x600mm, 600x600mm, 600x1200mm

400x600x20mm External Paver

Finishes: Surfacetec In/Out and External Paver

CORAL

ICE SILVER

CHAMPAGNE


PEARL

CLAY







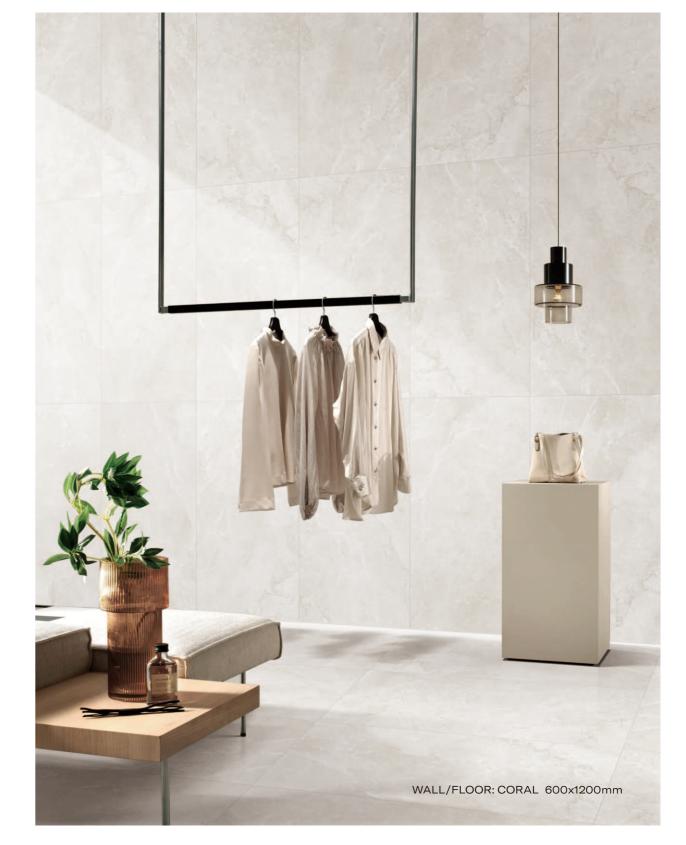

HAMILTON CORAL



600x1200mm 8 random faces





HAMILTON ICE SILVER



600x1200mm 8 random faces





 $3 \,$





HAMILTON CHAMPAGNE



600x1200mm 8 random faces



HAMILTON **PEARL**







HAMILTON PEARL

O FORMATS O APPLICATIONS SURFACES Thickness 300x300mm 400x600x20mm 300x600mm External Paver 600x600mm Interior Residential Exterior Light Commercial **─ ¥** 10mm Surfacetec In/Out External Paver ____ **±** 20mm Wall Pool Areas 600x1200mm Floor

600x1200mm 8 random faces



HAMILTON **CLAY**









HAMILTON CLAY 29

300x300mm 400x600x20mm 300x600mm External Paver 600x600mm Surfacetec In/Out **─ ¥** 10mm Interior Residential Exterior Light Commercial External Paver ____ **±** 20mm Wall Pool Areas 600x1200mm Floor

O APPLICATIONS

SURFACES

Thickness

600x1200mm 8 random faces

O FORMATS

31 FLOOR: CLAY 600x600mm

TECHNICAL SPECIFICATIONS

TECHNICAL CHARACTERISTIC	STANDARD PRESCRIBED VALUES		MANUFACTURER'S VALUES					
MEASUREMENT & SURFACE APPEARANCE								
LENGTH	EN ISO 10545-2	±0.6%	±0.1%					
WIDTH	EN ISO 10545-2	±0.6%	±0.1%					
THICKNESS	EN ISO 10545-2	±5%	±1%					
TRANSMUTATION	EN ISO 10545-2	±0.5%	±0.1%					
PHYSICAL PROPERTIES								
WATER ABSORPTION	EN ISO 10545-3	≤0.5%	≤0.1%					
BREAKING STRENGTH	EN ISO 10545-4	≥1300N	≥1300N					
MODULUS OF RUPTURE	EN ISO 10545-4	≥35N/mm²	≥35N/mm²					
RESISTANCE TO ABRASION	EN ISO 10545-7	_	CLASS 3					
SLIP RESISTANCE, WET PENDULUM TEST METHOD, SLIDER 96	AS 4586-2013/AMDT 1-2017 APPENDIX A	N/A	P4					
SLIP RESISTANCE, OIL-WET INCLINING PLATFORM TEST METHOD	AS 4586-2013/AMDIT 1-2017 APPENDIX D	N/A	R10					
CHEMICAL PROPERTIES								
RESISTANCE TO CHEMICALS RESISTANCE TO HOUSEHOLD CHEMICALS AND SWIMMING POOL SALTS	EN ISO 10545-13	MINIMUM GB	PASS					
RESISTANCE TO STAINING	EN ISO 10545-14 when subjected to chemicals	MINIMUM CLASS 3	PASS					

PACKING SPECIFICATIONS

SERIES	SIZES	PCS/CTN	M²/CTN	M²/PLT	CTN / PLT	KG/PLT
HAMILTON	600x1200mm	2	1.44	86.4	60	2070
	600x600mm	4	1.44	57.6	40	1240
	300x600mm	8	1.44	57.6	40	1240
	300x300mm	11	0.99	55.44	56	1232
	400x600x20mm	2	0.48	30.72	64	1440







